


150mm
100
50
10mm
0




STANDARD MARKER LETTERS 80 HIGH x 80 WIDE x 15 STROKE WIDTH TO BE ENGRAVED INTO THE KERB. KERB PAINTED **WHITE**.

KERB MARKING
OPTIONAL

NOTE:

1. ALL DIMENSIONS IN MILLIMETRES.
2. TYPE, LOCATION, AND ORIENTATION OF MARKERS (INCLUDING FOR SERVICE VALVES (TOBIES) TO BE IN ACCORDANCE WITH **COUNCIL STANDARDS**.
3. RAISED PAVEMENT RETRO-REFLECTIVE MARKERS TO COMPLY WITH AS 1906.3.
4. FH MARKINGS IN RIGHT OF WAYS TO FACE DOWN RIGHT OF WAY FROM MAIN ROAD

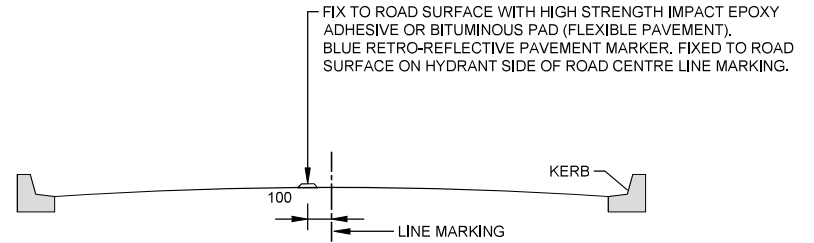

HYDRANT RETRO-REFLECTIVE PAVEMENT MARKER

SERVICE MARKER DETAILS

MARKER	PURPOSE	PAINTED COLOUR	DETAILS
T	FOR SERVICE CONNECTIONS	WHITE	N/A
V	FOR SLUICE AND GATE VALVES	WHITE	N/A
FH	FOR FIRE HYDRANTS	YELLOW	PAINT TOP OF KERB FACE FOR A WIDTH OF 300 AND PAINTED TRIANGLE ON CENTRELINE OF CARRIAGEWAY AS PER NZS 4509

© Copyright Standards New Zealand 2011. Drawings from NZS 4404:2010 have been reproduced with permission from Standards New Zealand under Copyright Licence 000904. Refer to the complete Standard available for purchase from Standards New Zealand. HDC AMENDMENTS TO NZS 4404:2010 SHOWN IN **BOLD**.



STANDARD DETAILS

VALVE AND HYDRANT IDENTIFICATION MARKERS

Drawn	Designed	
J. GOODMAN	KCDC	
Approved	Revision Date	
B. MAGUIRE	OCTOBER 2020	
Scale	Drawing No.	Revision
NOT TO SCALE	HDC-WS-006	R3